


IDEEN FÜR IHREN ERFOLG.

LÖSUNGEN FÜR DIE PROZESS-
UND LIFE SCIENCE INDUSTRIE



AVIPURE® – C Certification Package

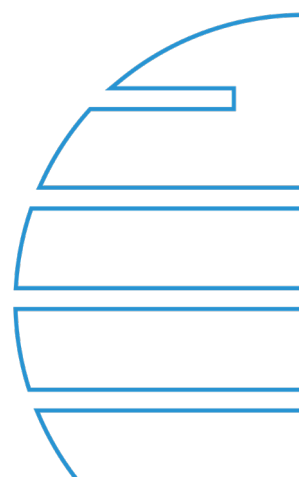

Content

1	Introduction	3
1.1	Development and Production of AVIPURE®-C	3
1.2	About Raumedic	3
1.3	Security of Supply	3
1.4	cGMP Conformity	3
1.5	Quality Management System.....	3
2	Technical Specifications	4
2.1	Tubing Dimensions, Type and Part Numbers Overview	4
2.1.1	AVIPURE C Printed	4
2.1.2	AVIPURE C Not Printed	4
2.2	Material Information	5
2.3	Material Compliance	5
2.4	Physical Properties	6
2.5	Physico-Chemical Properties.....	6
2.5.1	European Pharmacopoeia: 3.1.9 & FDA regulation 21CFR, § 177.2600.....	6
2.5.2	USP <661> - Containers, Physico-chemical Tests – Plastic.....	6
2.6	Biocompatibility	7
2.7	Tubing Printing.....	7
2.8	Extractable Profile.....	7
2.9	Sterilization Compatibility.....	7
2.10	General Properties, Shelf Life and Storage.....	8
3	Functional Tests	9
3.1	Pressure Testing.....	9
3.2	Pumping Lifetime	9
3.3	Flow Rate Data	9
4	BPOG studies on SIK8649	10

1 Introduction

This is a confidential document of avintos AG. Disclosure, copying and/or distribution forbidden. without prior written consent of avintos AG.

1.1 Development and Production of AVIPURE®-C

avintos AG specified the technical requirements for their AVIPURE®-C highly resistant platinum cured silicone tubing and has them manufactured through their partner Raumedic AG, Helmbrecht, Germany. AVIPURE® is a registered Trademark of avintos AG.

1.2 About Raumedic

As a partner of the international medical technology and pharmaceutical industry, Raumedic develops and produces components for customers, including tubing, catheters, and molded parts as well as complex groups of components and systems for a wide range of diagnostic and therapeutic uses. The company is 100 percent family owned.

1.3 Security of Supply

The Raumedic manufacturing plants operate under ISO 7 clean room conditions. Consistent process performance is ensured by the ongoing qualification of all manufacturing processes and personnel. Raumedic pursues a multiple sourcing strategy for the Silicone Pharma Grade Silicone SIK8649. Different suppliers are used for this grade to ensure the security of supply. Raumedic has validated the mechanical, physical, and chemical equivalence and will use the sources in parallel according to the market situation. The used sources can be traced back via batch traceability at any time and fulfill the agreed specification.

1.4 cGMP Conformity

Consistent high quality of silicone tubing is assured by careful selection of the raw material, well planned and validated production technologies, and an efficient Quality Assurance Department, all of which result in high batch-to-batch reproducibility.

1.5 Quality Management System

Raumedic is certified according to ISO 13485. avintos is certified according to ISO 9001:2015. You may download the certificates from the respective websites.

2 Technical Specifications

2.1 Tubing Dimensions, Type and Part Numbers Overview

Tubing coils made of Silicone SIK8649 are manufactured in several dimensions.

The color of the tubing is natural without addition of color pigments (Raumedic color no. 20900).

All tubing coils are provided in double PE bags packaged in a cardboard box.

Further dimensions upon request.

2.1.1 AVIPURE C Printed

TYPE	ID x OD DIMENSIONS	WALL THICKNESS	TUBING COIL LENGTH	ARTICLE-NUMBER
	MM	MM	M	
AVIPURE® - C 125-2	3.2 × 6.4	1.6	100	407HSC0125-2-100
AVIPURE® - C 250-2	6.4 × 9.5	1.6	50	407HSC0250-2-50
AVIPURE® - C 250-3	6.4 × 11.1	2.4	50	407HSC0250-3-50
AVIPURE® - C 375-4	9.5 × 15.9	3.2	25	407HSC0375-4-25
AVIPURE® - C 500-4	12.7 × 19.1	3.2	25	407HSC0500-4-25
AVIPURE® - C 625-4	15.9 × 22.2	3.2	25	407HSC0625-4-25
AVIPURE® - C 750-4	19.1 × 25.4	3.2	15	407HSC0750-4-15
AVIPURE® - C 750-5	19.1 × 28.6	4.8	15	407HSC0750-5-15
AVIPURE® - C 1000-5	25.4 × 34.9	4.8	10	407HSC1000-5-10
AVIPURE® - C 3-6	3.0 × 6.0	1.5	100	407HSC3-6-100

TYPE	ID x OD DIMENSIONS	WALL THICKNESS	TUBING COIL LENGTH	ARTICLE-NUMBER
	INCH	INCH	FT	
AVIPURE® - C 125-2	0.125 × 0.250	0.06	328	407HSC0125-2-100
AVIPURE® - C 250-2	0.250 × 0.375	0.06	164	407HSC0250-2-50
AVIPURE® - C 250-3	0.250 × 0.4375	0.09	164	407HSC0250-3-50
AVIPURE® - C 375-4	0.375 × 0.625	0.13	82	407HSC0375-4-25
AVIPURE® - C 500-4	0.500 × 0.750	0.13	82	407HSC0500-4-25
AVIPURE® - C 625-4	0.625 × 0.875	0.13	82	407HSC0625-4-25
AVIPURE® - C 750-4	0.750 × 1.0	0.13	50	407HSC0750-4-15
AVIPURE® - C 750-5	0.750 × 1.125	0.19	50	407HSC0750-5-15
AVIPURE® - C 1000-5	1.0 × 1.375	0.19	32.8	407HSC1000-5-10
AVIPURE® - C 3-6	0.118 × 0.236	0.06	328	407HSC3-6-100

2.1.2 AVIPURE C Not Printed

TYPE	ID x OD DIMENSIONS	WALL THICKNESS	TUBING COIL LENGTH	ARTICLE-NUMBER
	MM	MM	M	
AVIPURE® - C 125-2	3.2 × 6.4	1.6	100	407HSC0125-2-100NP*
AVIPURE® - C 250-2	6.4 × 9.5	1.6	50	407HSC0250-2-50NP*
AVIPURE® - C 250-3	6.4 × 11.1	2.4	50	407HSC0250-3-50NP*
AVIPURE® - C 375-4	9.5 × 15.9	3.2	25	407HSC0375-4-25NP*
AVIPURE® - C 500-4	12.7 × 19.1	3.2	25	407HSC0500-4-25NP*
AVIPURE® - C 625-4	15.9 × 22.2	3.2	25	407HSC0625-4-25NP*
AVIPURE® - C 750-4	19.1 × 25.4	3.2	15	407HSC0750-4-15NP*
AVIPURE® - C 750-5	19.1 × 28.6	4.8	15	407HSC0750-5-15NP*
AVIPURE® - C 1000-5	25.4 × 34.9	4.8	10	407HSC1000-5-10NP*
AVIPURE® - C 3-6	3.0 × 6.0	1.5	100	407HSC3-6-100NP*

*NP = Not Printed

2.2 Material Information

AVIPURE®-C silicone pharma tubing is made of the material grade Silicone SIK8649, a high purity silicone rubber suitable for pharma applications. Chemically Silicone SIK8649 is an addition cross-linked hot vulcanisate based on vinyl methyl dimethyl polysiloxane using silicic acid fillers and a platinum catalyst.

The material can be used continuously in a temperature range from -60 °C (-76 °F) to +200 °C (+392 °F) without losing its integrity or deterioration of its chemical | physiological properties.

The material Silicone SIK8649 shows good resistance to water up to 100 °C and to low-pressure steam up to 135 °C. Steam from higher temperatures leads to degradation, especially after prolonged exposure.

Silicone SIK8649 has good resistance to weak acids and alkalis. However, the material will degrade by strong acids and alkalis, which will be promoted at higher temperatures. The resistance is strongly dependent on the polar or non-polar character of the contact medium. While there is almost no swelling in polar contact media (e.g. water/alcohol), non-polar contact media (e.g. petrol/oil) cause medium to strong but reversible swelling.

The surface is coated in a plasma process. This coating provides a less sticky surface of these silicone tubing (Low Tack - see also 2.7) in comparison with common non-coated silicone products. Silicone tubing is colourless transparent or translucent.

2.3 Material Compliance

Based on experience and knowledge of the manufacturer about the materials and production processes the material formulation complies with / does not contain:

- Bisphenol A (BPA)
- Latex
- Phthalates
- Endocrine disruptors
- Ozone depleting substances (Regulation (EC) No 1005/2009)
- Perfluorinated chemicals (PFOA, PFOS)
- Persistent Bioaccumulative Toxins (PBTs)
- Persistent Organic Pollutants (POPs) (Regulation (EU) 2019/1021)
- Genetically Modified Organisms (GMO)
- Animal derived materials (Materials which present BSE/TSE risks)
- Conflict minerals (Dodd-Frank Act, Section 1502)
- RoHS (Directive 2011/65/EU, Directive (EU) 2015/863)
- Heavy Metals (CONEG, Directive 94/62/EC)
- CMR substances (Regulation (EC) No 1272/2008)
- Substances of Very High Concern (SVHC) as identified under article 33 of Regulation (EC) No 1907/2006 (REACH or substances listed in Annex XIV and Annex XVII)
- Nanomaterials (acc. to the definition Medical Device Regulation (EU) 2017/745)

as intentionally added components above threshold limits stated in aforementioned Regulations, Directives or Laws.

However, the raw materials used, and our final product(s) are not analyzed for the presence of traces of the above-mentioned substances.

This statement is valid until revoked or until new information is provided.
If you require further information, please contact your responsible sales contact.

2.4 Physical Properties

PROPERTY	NORM	SILICONE SIK8649
Shore hardness A	ISO 48-4	60 ± 5
Density (g/cm ³)	ISO 1183	1.15
Tear strength (MPa)	ISO 527	≥ 8.0
Elongation at break (%)	ISO 527	≥ 500
Compression Set (% , 22h / 175 °C)	ISO 815-1 type B	≤ 15 %

The physical properties of the raw material were determined on standard test specimen. The specified values represent guide values.

2.5 Physico-Chemical Properties

2.5.1 European Pharmacopoeia: 3.1.9 & FDA regulation 21CFR, § 177.2600.

Test results

Silicone tubing in silicone rubber meets the requirements of the European Pharmacopoeia 3.1.9. and regulation 21 CFR, § 177.2600. The test methods, limits and results are those described by the E.P. monograph and listed in the table below.

TEST DESCRIPTION	E.P. 3.1.9 LIMITS	RESULTS ON SILICONE TUBING: PASS OR FAIL
Appearance of Solution	Colourless	Pass
Acidity	≤ 2.5 mL NaOH 0.01M	Pass
Alkalinity	≤ 1.0 mL HCl 0.01M	Pass
Reducing Substances	≤ 1 mL	Pass
Substances Soluble in Hexane	≤ 15 mg	Pass
Volatile Matter	< 2 %	Pass
Mineral Oils	< 1 ppm	Pass
Platinum	< 30 ppm	Pass

2.5.2 USP <661> - Containers, Physico-chemical Tests – Plastic

Test results

The silicone tubing meets the USP <661> requirements when sterilized at 50 kGy with and without aging conditions corresponding to a shelf life of 5 years.

TEST DESCRIPTION	USP <661> LIMITS	RESULTS ON SILICONE TUBING: PASS OR FAIL
Non Volatile Residue	< 15 mg	Pass
Residue on Ignition	< 5 mg	Pass
Heavy Metals	< 1 ppm	Pass
Buffering Capacity	< 10 mL	Pass

2.6 Biocompatibility

Samples of silicone pharma tubing with compound SIK8649 were tested in accordance with the below mentioned standards to assess state-of-the-art biocompatibility requirements. This includes ISO 10993 testing as well as USP class VI tests to evaluate toxicity systemically, intracutaneously, and through implantation. Results according EXB_003813 Material Information Package_SIK8649-1.0, dated January 18th, 2022.

TESTING	STANDARD	RESULT
Hemolysis	ISO 10993-4	Pass
In-vitro Cytotoxicity	ISO 10993-5	Pass
Implantation	ISO 10993-6	Pass
Sensitization	ISO 10993-10	Pass
Pyrogenicity	Eur. Ph.	Pass
USP Class VI Intracutaneous Reactivity in the rabbit 1)	USP <88>	Pass
USP Class VI – Systemic Toxicity in the mouse 1)	USP <88>	Pass
USP Class VI – Implantation muscle in the rabbit 1)	USP <88>	Pass

1) Tests were performed on gamma irradiated samples (50 kGy)

Note:

AVIPURE®-C hoses are not intended for use as an implant material. Not suitable for blood or human fluids.

2.7 Tubing Printing

The tubing is printed with the AVIPURE®-logo, type, size, lot number and manufacture date, but is also available unprinted.

Silicone pharma tubing with compound SIK8649 features the patented Low-Tack surface treatment providing enhanced technical and handling properties.

The biocompatibility of the ink was proven by successfully performed ISO 10993-5 and USP <88> testing.

2.8 Extractable Profile

The study on the extractables profile for silicone pharma tubing with compound SIK8649 was performed according to BPOG “BioPhorum Best Practices Guide for Extractables Testing of Polymeric Single-Use Components Used in bio- pharmaceutical Manufacturing” released in April 2020.

The assessment on gamma-irradiated and autoclaved tubing will be provided upon request.

2.9 Sterilization Compatibility

It is the responsibility of the user to validate a sterilization process with autoclave for silicone tubing.

Silicone pharma tubing with compound SIK8649 tubing is produced for single use. The product will be delivered non-sterile.

Sterilization with gas (ethylene oxide, ETO), steam (up to 135 °C), gamma or X-rays (Dose: max. 50 kGy) is generally recommended. The suitability of the material must be evaluated by the user. Possible material damage depends on the sterilization conditions (temperature, pressure, energy, time, packaging unit and distance to the radiation source).

Multiple sterilization is not recommended, neither with different nor the same sterilization method.

However, sterilization of silicone tubing with multiple CIP/SIP-cycles at 135 °C does not impair fit, form or function of the products. The amount of the repetitions and the process conditions used are within the validation responsibility of the user. The user is obliged to examine the re-sterilizability under application-related conditions, since the number of resterilization cycles may be influenced by the flow medium/ cleaning agent and/ or mechanical stress applied throughout application lifetime.

2.10 General Properties, Shelf Life and Storage

According to the current state-of-the-art individual fisheyes due to raw material and processing, foreign material, dirt inclusions and air bubbles as well as contamination on the tubing surface, like intrinsic particles and fluff, cannot be completely excluded.

The following shelf life is valid for the non-sterile, originally packed products.

A slight discoloration of the material might appear over storage time which may vary from batch to batch in intensity. This material related aging effect is common and does neither affect functionality nor material properties of silicone pharma tubing with compound SIK8649 in the scope of specified physical properties as well as shelf-life.

The shelf life of the tubing made of silicone pharma tubing with compound SIK8649 in non-sterile condition and originally packed is 5 years. There is no substantial change of the specified physical, chemical and physiological parameters of the tubing material after that period of time.

The following storage conditions shall apply:

- Storage in original packaging
- Dry (Standard conditions 10 – 75% relative humidity)
- Temperature 15 - 25°C with short-term deviations 5 – 35°C
- Goods protected from moisture
- Goods protected from directly exposure to UV-light
- Not in the environment and in presence of chemicals, e.g. solvent and disinfectant

3 Functional Tests

3.1 Pressure Testing

The pressure ratings represent typical reference values for selected dimensions. The tests were conducted on a test bench in accordance with ISO 1402 at ambient conditions. The values are applicable for non-sterile as well as sterilized tubing.

TYPE	DIMENSIONS	AIR PRESSURE LIMIT RESISTANCE	MAX. RECOMMENDED WORKING PRESSURE
	MM	BAR	BAR
AVIPURE® - C 125-2	3.2 × 6.4	≥5.0	≤ 1.5
AVIPURE® - C 250-2	6.4 × 9.6	≥3.0	≤ 1.5
AVIPURE® - C 250-3	6.4 × 11.1	≥4.0	≤ 1.5
AVIPURE® - C 375-4	9.6 × 15.9	≥4.0	≤ 1.5
AVIPURE® - C 500-4	12.7 × 19.1	≥4.5	≤ 1.5
AVIPURE® - C 625-4	15.9 × 22.2	≥3.5	≤ 1.5
AVIPURE® - C 750-4	19.1 × 25.4	≥3.5	≤ 1.5
AVIPURE® - C 750-5	19.1 × 28.6	≥3.0	≤ 1.5
AVIPURE® - C 1000-5	25.4 × 34.9	≥3.0	≤ 1.5
AVIPURE® - C 3-6	3.0 × 6.0	≥5.0	≤ 1.5

3.2 Pumping Lifetime

Reference pumping lifetime for selected dimensions to assess the mechanical resistance of the tubing under pumping conditions. The stated values are based on external test data.

The tests were conducted in a peristaltic roller pump. The tubing was pumping water at ambient temperature between 2 tanks mimicking recirculation conditions. The test was stopped, and time measured at tubing break resulting in leak.

TYPE	DIMENSIONS	PUMP SPEED	PUMPING LIFETIME
	MM	RPM	H
AVIPURE® - C 250-3	6.4 × 11.1	210	>70
AVIPURE® - C 500-4	12.7 × 19.1	310	>70
AVIPURE® - C 750-5	19.1 × 28.6	310	>70

3.3 Flow Rate Data

The objective of this test was to assess the maximum flow rate of selected dimensions by means of an peristaltic roller pump. The stated values are based on external test data.

TYPE	DIMENSION	PUMP SPEED	FLOW RATE*
	MM	RPM	L/MIN
AVIPURE® - C 250-3	6.4 x 11.1	310	>1.2
AVIPURE® - C 500-4	12.7 x 19.1	310	>8.9
AVIPURE® - C 750-5	19.1 x 28.6	310	>20.0

*The measured values given are empirically determined guide values

Remarks:

- The bursting pressure of the AVIPURE® - C hose is reduced by around 20% per temperature increase of 93°C until the maximum hose temperature is reached. The reduction is linear
- Pressure limit rates can be limited by used end connections
- Norm: ISO 1307 for dimensional tolerances
- Technical contents are subject to change with revision but without prior notice

4 BPOG studies on SIK8649

The studies were designed to provide extractables profiles for SIK8649 biopharmaceutical tubing (autoclaved and gamma irradiated) using 6 different test solutions according BPOG protocol in the version from 2014.

They include :

1. pure water
2. 50 % ethanol (v/v)
3. 5 M NaCl
4. 1 % Polysorbate 80
5. 0.1 M H₃PO₄
6. 0.5 M NaOH.

If you require further information, please contact your responsible sales contact.